

C6 PATCH PANEL UTP 50u

Performance:
Meets C6 EIA/TIA 568B Standard.

Materials:
Front Plate : Fireproof ABS UL-94V0
Panel : Metal (SPCC)
Cable Management : Metal (SPCC)
Jack : 8P8C 50 micro inches gold plated
PCB : FR-4 / UL-94V0
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Bronze & Tinned
IDC Description : For 22-26 AWG.
For 110 or Krone punch-down Tool

Electrical Specifications:
Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps.
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.
Mechanical Specifications:
IDC Punch Down Cycle : Over 250 Cycles (min.)
Jack Insertion Cycle : Over 2000 Cycles (min.)
Operation Temperature : -40 °C ~ +70 °C



Marking:
Printed Letter:
Packing:
1 pc / AMDEX color box
10 pcs / carton

Cat.6
AMDEX



accessories

Color coding information
T568B: 1-WH/OR 2-OR 3-WH/GN 4-BL 5-WH/BL 6-GN 7-WH/BR 8-BR
T568A: 1-WH/GN 2-GN 3-WH/OR 4-BL 5-WH/BL 6-OR 7-WH/BR 8-BR

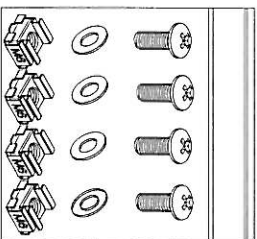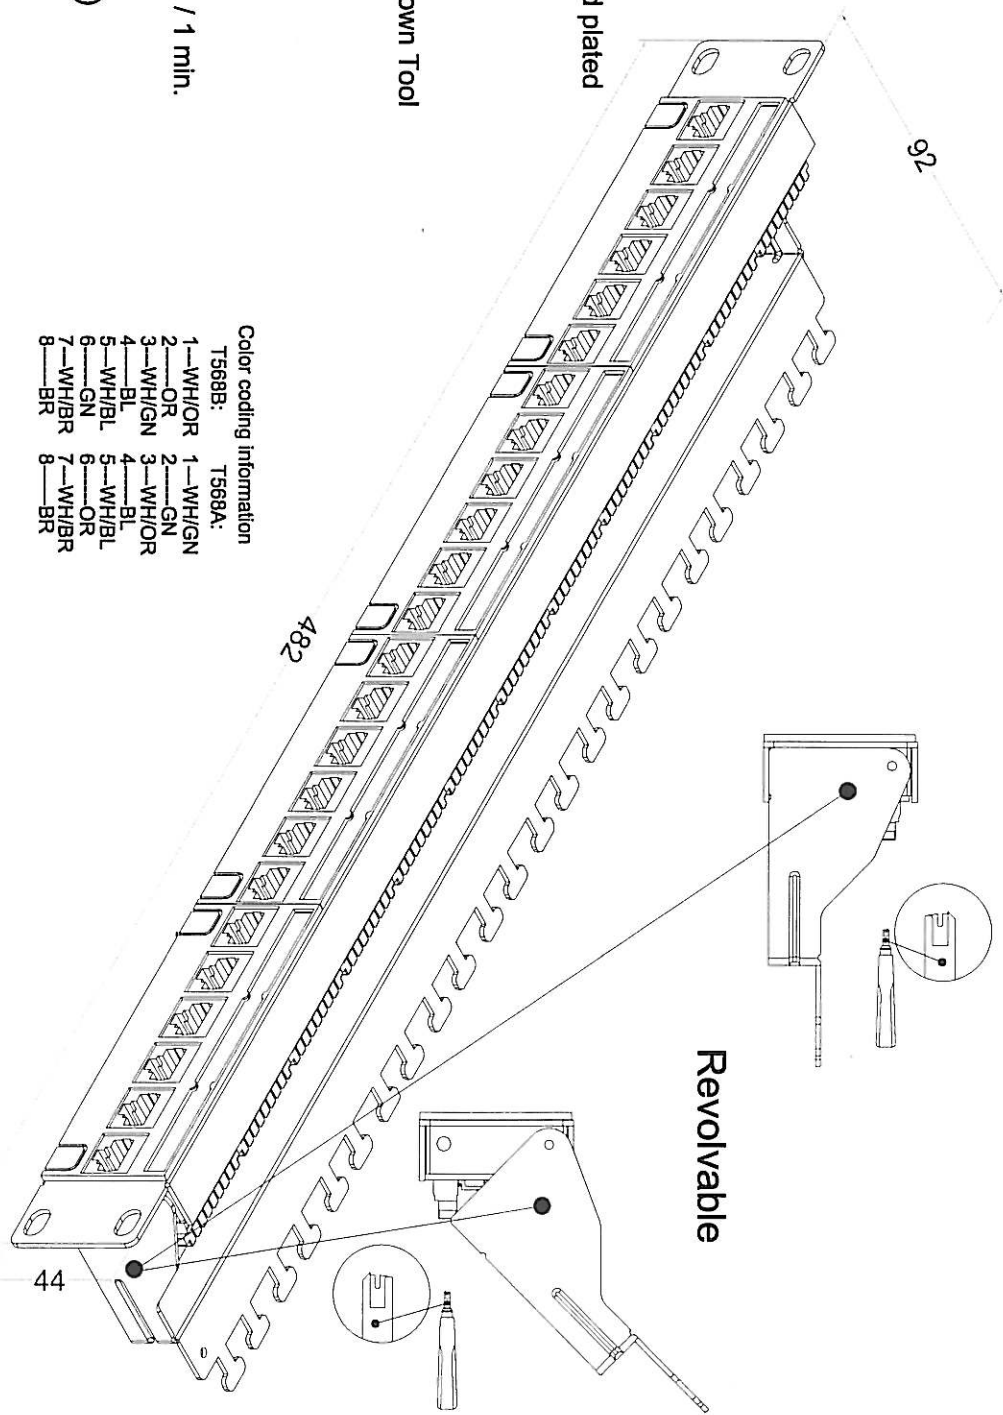

DRAW NO:	ITEM NO:	DA620
UNIT: A/PPR	CUSTOMER:	
SCALE: m/m	DATE:	
Ref. NO:	TOLERANCE:	• ± 1 • X ± 0.2 • XX ± 0.15

AMDEX