

# Cat.6 16Port Patch Panel (UTP)

## Performance:

Meets Cat.6 EIA/TIA 568B.2-1 Standard.

## Materials:

Panel : Metallic Panel (SPCC)

Plastic Body : Fireproof ABS UL-94V0

RJ-45 Jack : Housing-PBT /

8P8C 50 micro inches gold plated

PCB : FR-4 / 1.6mm UL-94V0

IDC Body : Fireproof ABS UL-94V0

IDC Pin : Bronze & Tinned

Label Color Code: T568 A

IDC Description: For 22-26 AWG.

For 110 or Krone punch-down Tool

## Electrical Specifications:

Insulation Resistance : 500M ohms (min.)

Contact Resistance : 20m ohms (max.)

Current Rating : 1.5 Amps .

DC Resistance : 0.1 ohm (max.)

Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

## Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)

RJ-45 Jack Insertion Cycle : Over:2000 Cycles (min.)

Operation Temperature : -40 ~ +70 degree / C


## Marking:

Printed Letter:

Cat.6

AMDEX

N3674

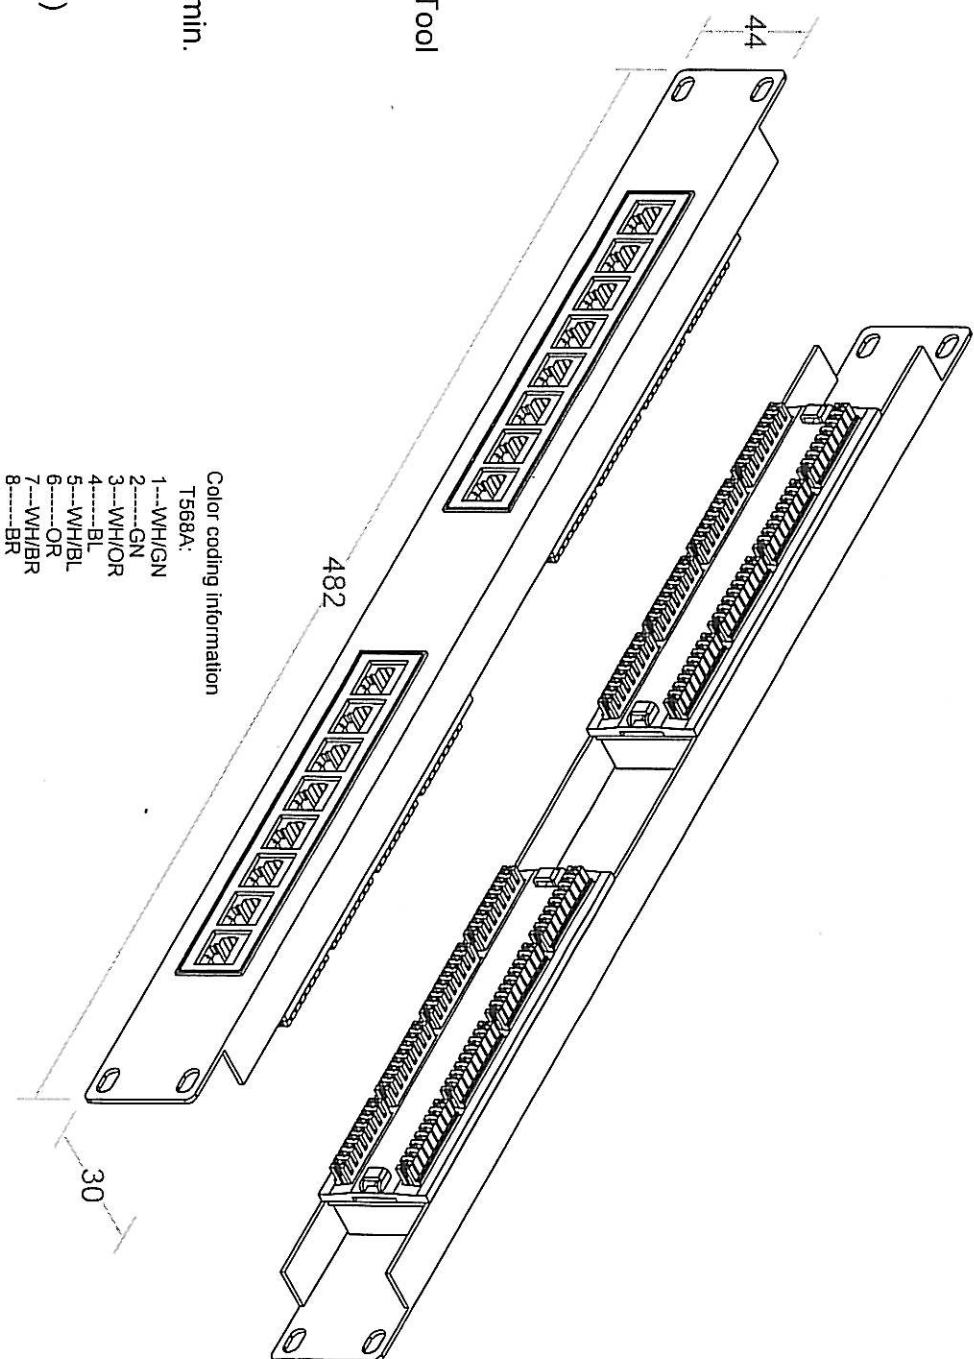

DRAW NO:	ITEM NO:	DA-621
APPR	G.O.	CUSTOMER:
CHECK	DATE:	
SCALE:	DESIGN	TOLERANCE: ± 1 · X ± 0.1 · XX ± 0.15