


Cat.6 12Port Mini Patch Panel (UTP)

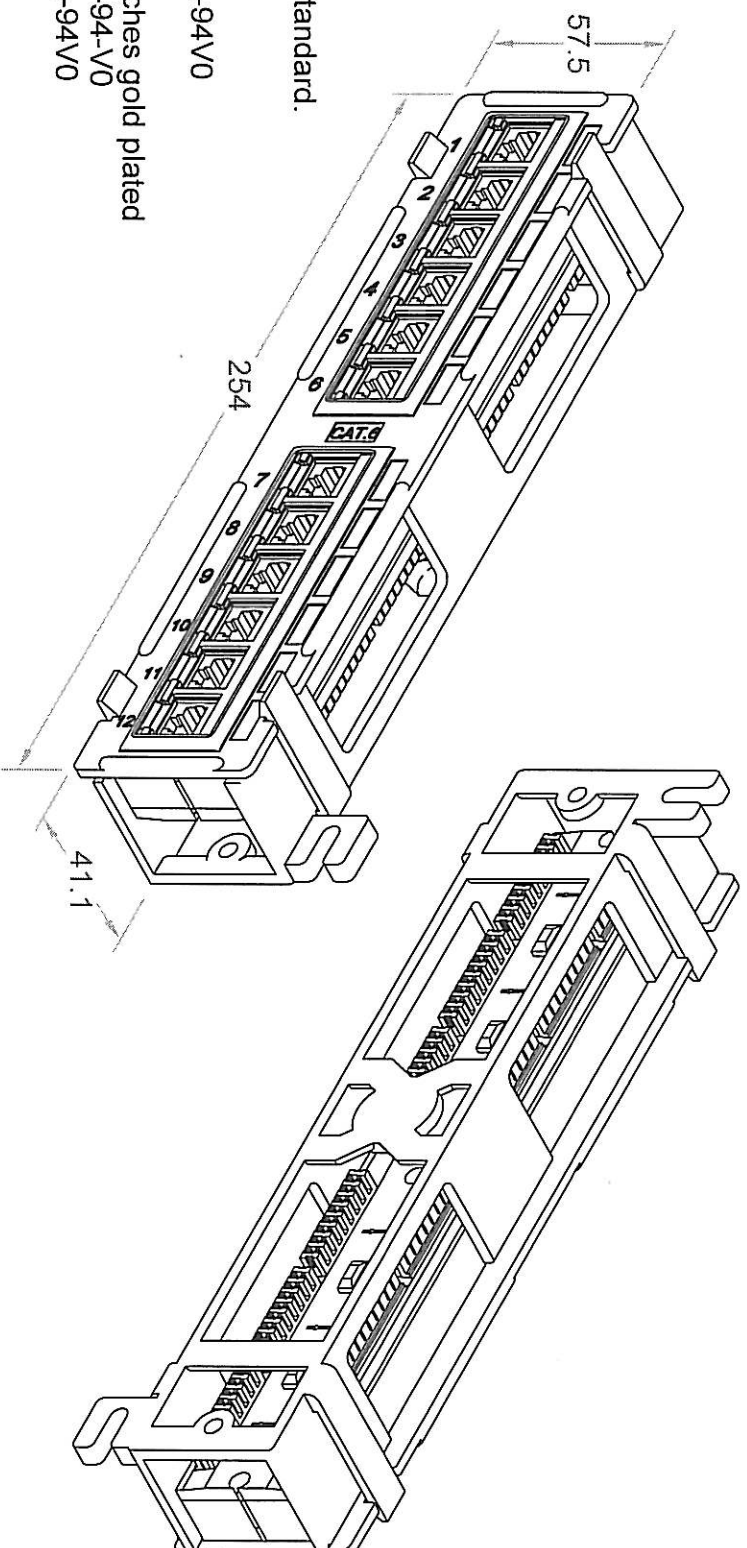

Performance:

Meets Cat.6 EIA/TIA 568B.2-1 Standard.

Materials:

Plastic Body : Fireproof ABS UL-94V0
RJ-45 Jack : Housing-PBT /
8P8C 50 micro inches gold plated
PCB : FR-4 / 1.6mm UL-94-V0
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Bronze & Tinned

Label Color Code: T568 A

IDC Description: For 22-26 AWG.

For 110 or Krone punch-down Tool

Electrical Specifications:

Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps.
DC Resistance : 0.1 ohm (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)
RJ-45 Jack Insertion Cycle : Over 2000 Cycles (min.)
Operation Temperature : -40 ~ +70 degree / C

Marking:

Printed Letter:

AMDEX



N3674

Color coding information

T568A:

1---WH/GN
2---GN
3---WH/OR
4---BL
5---WH/BL
6---OR
7---WH/BR
8---BR

DRAW NO:		ITEM NO:	DA-623
	APPR	G.O.	CUSTOMER:
UNIT: m/m	CHECK		DATE:
SCALE:	DESIGN	TOLERANCE:	· ± 1 · X ± 0.1 · XX ± 0.15