



# C6 PATCH PANEL UTP 50u

Performance:  
Meets C6 EIA/TIA 568B Standard.

Materials:  
Front Plate : Fireproof ABS UL-94V0  
Panel : Metal (SPCC)  
Jack : 8P8C 50 micro inches gold plated  
PCB : FR-4 / UL-94V0  
IDC Body : Fireproof ABS UL-94V0  
IDC Pin : Bronze & Tinned

IDC Description : For 22-26 AWG.  
For 110 or Krone punch-down Tool

Electrical Specifications:  
Insulation Resistance : 500M ohms (min.)  
Contact Resistance : 20m ohms (max.)  
Current Rating : 1.5 Amps.  
DC Resistance : 0.1 ohms (max.)  
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

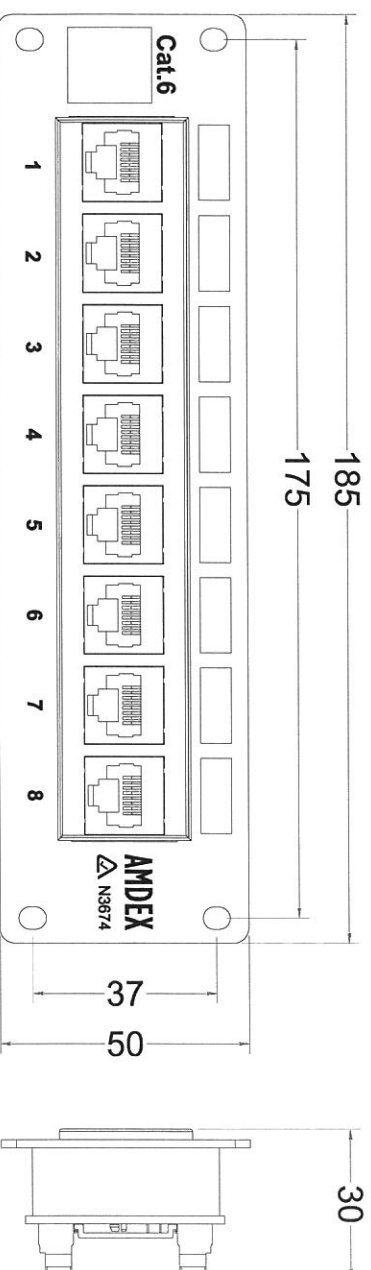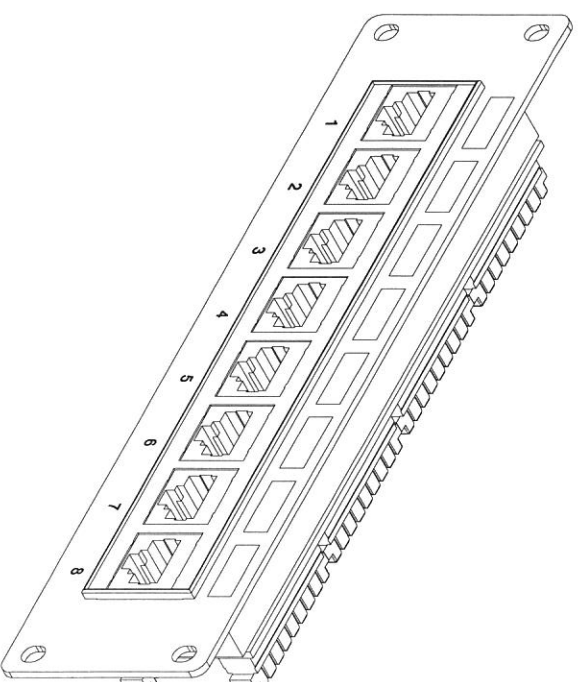

Mechanical Specifications:

IDC Punch Down Cycle : Over 250 Cycles (min.)  
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

DRAW NO:		ITEM NO:	DA801
APPR		CUSTOMER:	
UNIT: m/m	DESIGN	DATE:	
SCALE:	Ref. NO:	TOLERANCE:	• ± 1 • X ± 0.2 • XX ± 0.15

AMDEx