



C6 PATCH PANEL UTP 50u

Performance:
Meets C6 EIA/TIA 568B Standard.

Materials:
Front Plate : Fireproof ABS UL-94V0
Panel : Metal (SPCC)
Jack : 8P8C 50 micro inches gold plated
PCB : FR-4 / UL-94V0
IDC Body : Fireproof ABS UL-94V0
IDC Pin : Bronze & Tinned


IDC Description : For 22-26 AWG.
For 110 or Krone punch-down Tool

Electrical Specifications:
Insulation Resistance : 500M ohms (min.)
Contact Resistance : 20m ohms (max.)
Current Rating : 1.5 Amps.
DC Resistance : 0.1 ohms (max.)
Withstanding Voltage : 1000 VAC RMS @ 60Hz / 1 min.

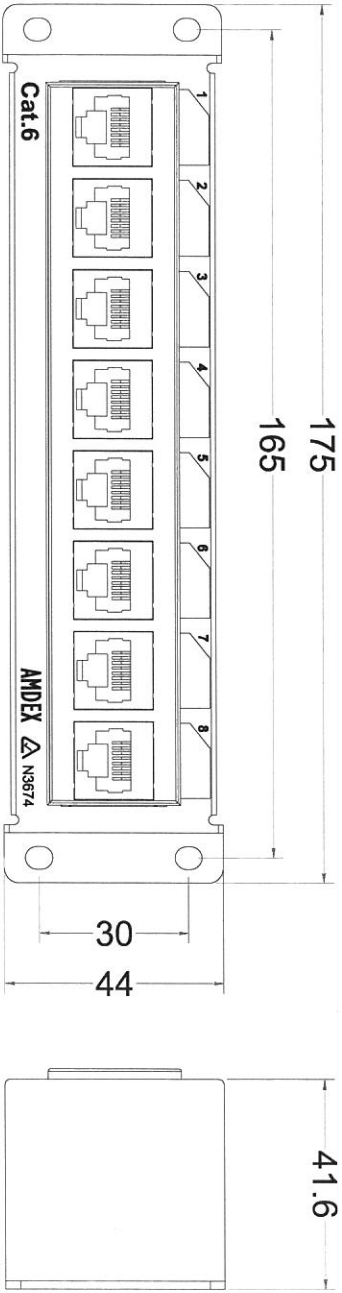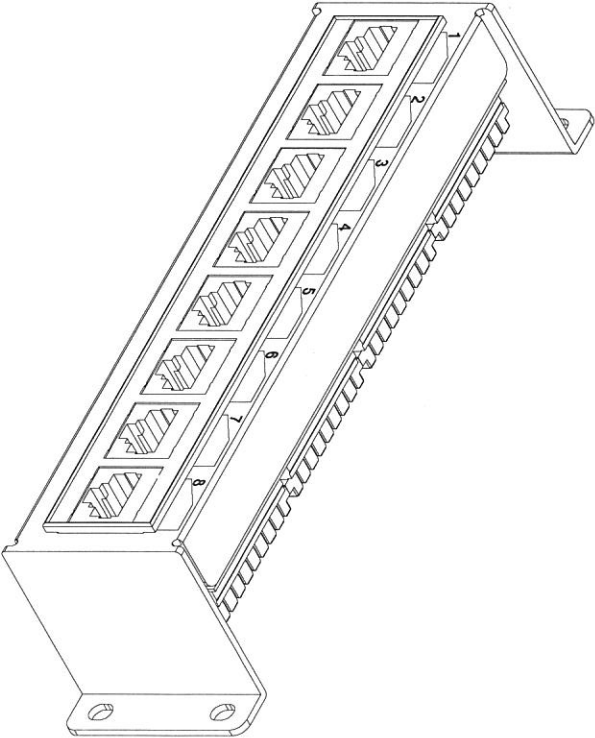

Mechanical Specifications:
IDC Punch Down Cycle : Over 250 Cycles (min.)
Jack Insertion Cycle : Over 2000 Cycles (min.)

Operation Temperature : -40 °C ~ +70 °C

| | | | |
|---|----------|------------|-----------------------------|
| DRAW NO: | APPR | ITEM NO: | DA802 |
| UNIT:  | DESIGN | CUSTOMER: | |
| SCALE: m/m | Ref. NO: | DATE: | |
| | | TOLERANCE: | • ± 1 • X ± 0.2 • XX ± 0.15 |

AMDEX